




Door Entry Security

2 Wire Audio

AUDIO-ONLY INTERCOM

DOOR ANSWERING SYSTEM

A basic system comprises a H2-595A Door station with call button and 2 Way audio connections via the H2-DJ4 system to a H2-DJ4. Power is supplied by use of a 24Vdc power pack and a DPS power injector. An EL971 Door Catch can also be used for door entry. All items are sold separately.

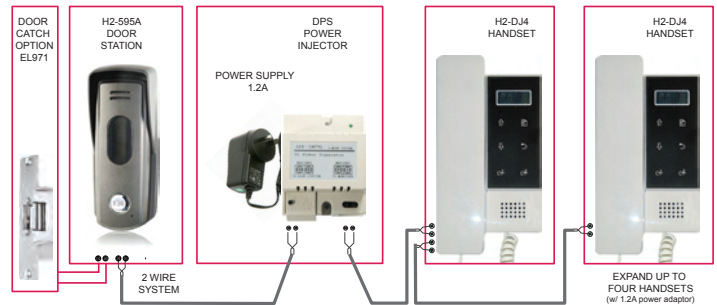


LOOK-C

Door Intercom Systems

EXPANDABLE SYSTEM

The real value of this system is its expandability into an advanced programmable system of multiple door entry and monitors by use of additional H2 accessories.

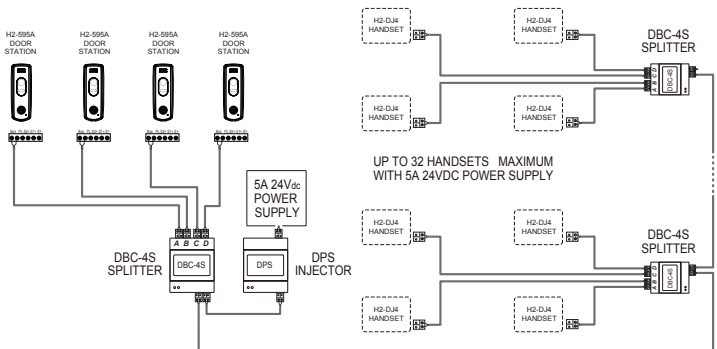

See manuals for details
<http://data.wescomponents.com/lookc/>

AUDIO-ONLY DOOR STATION

- Audio only, no camera.
- 2 Wire compatible.
- Door bell call button.
- Microphone and speaker to converse.
- LED indicators Talk/Unlock.
- Programmable unit ID Code.
- Door strike output optional.
- Metal construction IP55.
- 24Vdc 60/200mA
- 137x49x28mm



Code
H2-595A

AUDIO-ONLY HANDSET

- Handset audio only phone intercom & door answer
- Touch sensor button modern style with LED display
- Programmable ring tones for intercom or door station
- 2x door open buttons programmable from 4 doors
- Compatible with all H2 outdoor & Indoor stations
- 24V (25mA/110mA)
- 187x97x33mm



Code
H2-DJ4

AUDIO-ONLY POWER REQUIRED

INJECTOR - DIN MOUNT

Inserts power from a 24V source and inserts it into the twisted pair line.

Code
DPS



POWER PACK 24VDC 6A

As required to power the DPS injector.

Code
SMP24V6A-25P



HANDSET SPLITTER

FOUR WAY BRANCH

Splits 2-Wire system into Four audio output for handsets. Extra DBC4S can be added to the master line if required.

or
 Four video inputs for combining door cameras with door control. DIN Mount.

Code
DBC-4S



RAIN HOOD

SUIT H2-595A

Outdoor weather resistant rain shield zinc alloy.

Code
RH595




ANGLE BRACKET

SUIT H2-595A

Tilt door station to the left or right 30°. Outdoor weather resistant zinc alloy.

Code
AB595



DOOR STRIKE

FAIL SECURE

Remote entrance Door catch release. Requires a trigger of 12Vdc 500mA to enable a door to be pushed open. Mounts into the frame, replacing the door catch. 150mm Mortise Mount.

Code
EL971





Look-C Door Intercom

Door Entry Security

2 Wire Video


2 WIRE DOOR VIDEO INTERCOM

Latest in door video innovation. Intelligent twin wire system which allows for a quick and economical installation. System setup is easy via the comprehensive yet simple menu system. Modern design and style to suit all modern decors.


- No polarity, twisted pair, easy wire solution. Use Cat5 or twin core cable
- One common power supply to door stations and monitors
- Supports 1 to 4 monitors connected in a daisy chain (loop in, loop out) for easy installation.
- Can be star wired by the addition of a 4 way splitter (DBC-4S)
- Supports 1 door station or can be expanded to support up to 4 door stations by adding a splitter (DBC-4S)
- Door stations can open door latches (EL971 Optional)
- Power supply and injector built into one DIN mountable module for ease of mounting and wiring

Ordering is simple, order the door station, monitor of your choice with the PC6 package and as many additional monitors you require, up to 4. If more than 4 monitors are required, not a problem, the system can be expanded up to 16 monitors however a higher current power supply and one 4 way splitter for each set of 4 monitors is required. Please see our website for more information. data.wescomponents.com/lookc/

Basic wiring mode for loop in / out (daisy chain) wiring

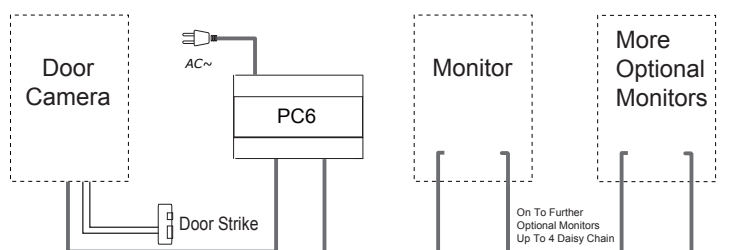

Basic wiring for star configuration

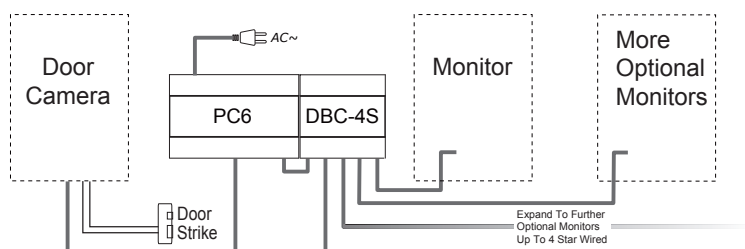

LOOK-C Door Intercom Systems

2-WIRE
VIDEO
SYSTEM



Talk between Monitors



Touch Control LCD
OPTION



Lights On !
OPTION



Photo Frame

If more than 4 monitors are required, not a problem, the system can be expanded up to 16 monitors however a higher current power supply and one 4 way splitter (DBC-4S) for each set of 4 monitors is required. Please see our website for more information.

<http://data.wescomponents.com/lookc/>

DOOR ENTRY CAMERA

IP45 OUTDOOR

Sharp brand CCD in a heavy duty door station with hood.
Attractive and stylish zinc-alloy housing.
Camera's viewing angle is adjustable.
LED lit name plate display
IP45 weather rating.
IR illumination for 0 lux night vision
176x90x23mm. requires cable.

Code
H291RH

Sold separately.
Requires cable
and monitors.



See our website for wiring details.
<http://data.wescomponents.com/lookc/>

DUPLEX CAMERA

ONE CAMERA TO TWO DWELLINGS

One monitor to two dwellings (duplex).
Sharp brand CCD in a heavy duty door station.
Two call buttons with illuminated labels.
IP45 weather rating.
IR illuminated for 0 lux night vision.
176x90x23mm.
Requires cable.

Code
H292RH

Sold separately.
Requires cable
and monitors.



See our website for wiring details.
<http://data.wescomponents.com/lookc/>



7" LCD COLOUR VIDEO DOOR MONITOR - TOUCH SCREEN H2

HIGH-RESOLUTION MONITOR WITH VISITOR RECORDING FEATURE

7" Colour Digital TFT Monitor with touch screen and SD card recording. Low-profile minimalist style in ultra-modern contemporary design. No protruding buttons! Super sleek touch control. Back illuminated. Full colour High resolution TFT LCD 16:9 wide screen 800x480px. Easy Icon GUI menu control for advanced feature set system.


- Digital TFT Screen
- Touch sensor button
- 118Mb Inner flash memory
- Max.16Gb SD card picture memory
- Home away auto memory
- 1/4/8 auto photo shooting
- Digital Photo Frame Playback
- Power supply: 24Vdc 400mA
- LCD 840x480px wide-screen
- 125x225x28mm

**2-WIRE
VIDEO
SYSTEM**



PC6 Power Supply includes 24Vdc and Injector.
Accepts one or two door cameras, sold separately.
Expansion accessories available. See H2 system.

| Record | Details | Code |
|--------|----------------------------------|----------|
| Yes | 7" Monitor with PC6 Power supply | H2-27SDD |
| Yes | 7" Monitor only | A2-27SDD |
| No | 7" Monitor with PC6 Power supply | H2-27TD |
| No | 7" Monitor only | A2-27TD |

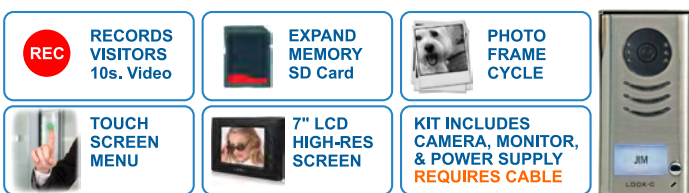

4" LCD COLOUR VIDEO DOOR INTERCOM H2

LOOK-C LOW-PROFILE WIDE-SCREEN

- High quality 4"TFT LCD Digital Screen
- Colour icon and text menu display OSD
- Plastic housing with aluminium front panel
- Streamlined & thin design. 23mm thin.
- Assorted melody chimes (x12) programmable
- Compatible with all H2 outdoor & Indoor stations
- Power Supply 24Vdc (Optional)
- Standby 15mA; Working status 210mA (on)
- 4" Digital 4:3 TFT 320*240 pixels
- Wiring: 2-wire (no polarity) up to 100M
- 200x135x23mm

| Details | Code |
|----------------|--------|
| Monitor w/ PC6 | H2-254 |
| Monitor Only | A2-254 |

Note: H2-254 w/ PC6 refers to the 1.5A power supply and injector required one per system (depending on total power requirements: See DPS option).

LOOK-C
Door Intercom Systems



<http://data.wescomponents.com/lookc/>

3.5" LCD COLOUR VIDEO DOOR INTERCOM H2

2-WIRE STATION VERTICAL DESIGN

3.5" Colour Digital TFT Screen 320x240px. Compact and slim design to suit any decor. White plastic casing with silver surround. Modern vertical style, brushed aluminium trim. Kit Includes monitor and PC6 powerpack. All parts available separately for expansion.

- Entrance Monitoring view
- Auto On with Call button
- Converse with entrance
- Door open control with
- Optional Door Catch
- up to two locks per station
- Intercom between monitors
- Monitors naming function
- GUI Menu system
- Selectable door chime
- Adjustable picture
- Light On (Req. DCU)
- Expand up to 16 units
- 220x110x20mm
- 210mA (on)

| Details | Code |
|----------------|--------|
| Monitor w/ PC6 | H2-16D |
| Monitor Only | A2-16D |

Note: H216D w/ PC6 refers to the 1.5A power supply and injector required one per system (depending on total power requirements: See DPS option).



<http://data.wescomponents.com/lookc/>

HANDSET AUDIO-ONLY

- Handset audio only phone intercom & door answer
- Touch sensor button modern style with LED display
- Programmable ring tones for intercom or door station
- 2x door open buttons programmable from 4 doors
- Compatible with all H2 outdoor & Indoor stations
- 187x97x33mm 24V (25mA/110mA) 2 Wire system

| Code |
|--------|
| H2-DJ4 |

<http://data.wescomponents.com/lookc/>





PC6 POWER SUPPLY WITH INJECTOR

Suitable only for the 2wire (H2) systems.
Din Rail mount. 140x90x60mm
100 – 240v Ac input

Code
PC6

**2-WIRE
VIDEO
SYSTEM**



POWER INJECTOR DPS

Used when a higher current power supply is required. The DPS injects power into the 2 wire system to allow all of the door stations and monitors to operate from one power source.
Din rail mount, or wall mount.

Injector only, power supply required.
See our website for wiring details.

Code
DPS

Injector Only.
Requires Power Supply.
24Vdc.



POWER SUPPLY OPTIONS FOR DPS

REQUIRES DPS H2 INJECTOR

2-Wire system is designed to be economical in power. For a single monitor and camera combination the 1A power supply PS6 will suffice. However, it is recommended that if the system is expanded, that using the DBC4 injector and then connect a high current supply. 24V @ 6 Amps. 170x60x40mm

Code
SMP24V6A-25P



TWISTED PAIR DROP CABLE

High grade, high current, low loss, low capacitance. Extends distance of standard CAT5 runs by twice as far. Twisted pair in black PVC Jacket, ideal for running through walls and areas which are damp and prone to water penetration or applications where a better quality cable is required. 8mm Outer sheath 1mm thick "Drop Cable" Jacket. 3mm with 48 strands x 0.2mm x 2 core.

Length Code
100M CAB4822



| From | CAT5 | CAB4822 | DPS | CAT5 | CAB4822 | To |
|--------|------|---------|-----|------|---------|---------|
| Camera | 40M | 80M | PC6 | 50M | 100M | Monitor |

SPLITTER 4 WAY DBC-4S

Required when additional door stations (max 4) or additional monitors, (Max 16) are required.
One DBC-4S is required per 4 monitors.

Code
DBC-4S



See our website for wiring details.

CCTV CONTROL UNIT H2

ANALOGUE VIDEO WITH LOCK CONTROL

Allows the 2 wire system to be expanded to include up to 2 Analogue cameras. Incorporates call button input and control output for light or door opener.

Code
DCU




See our website for wiring details.

DOOR STRIKE

FAIL SECURE

Remote entrance Door catch release. Compatible with our door intercoms and other units. Requires a trigger of 12Vdc 500mA to enable a door to be pushed open. Mounts into the frame, replacing the door catch. Power supply NOT included. 150mm Mortise Mount.


Code
EL971

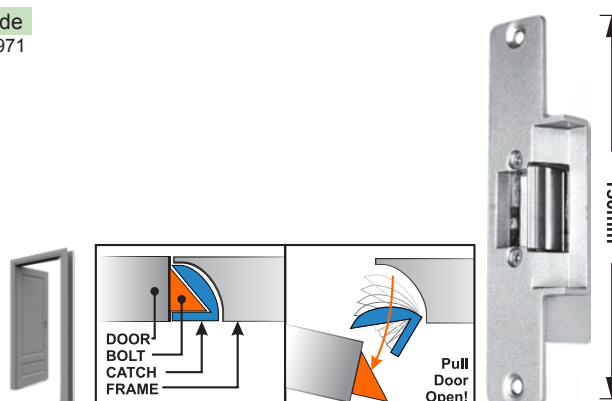



□ Door Entry Security

□ 4 Wire Video

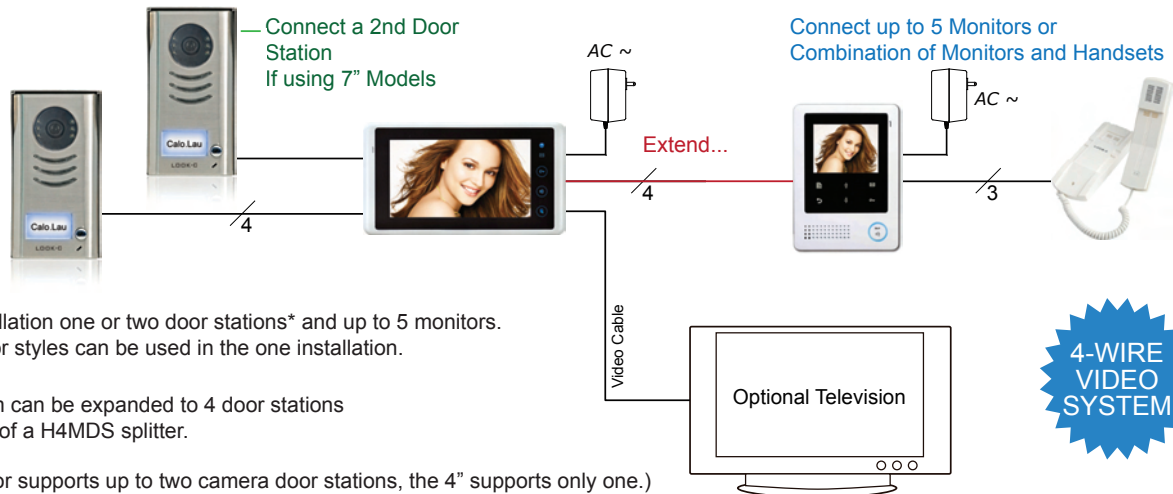

Basic installation one or two door stations* and up to 5 monitors.
Any monitor styles can be used in the one installation.

The system can be expanded to 4 door stations
by the use of a H4MDS splitter.

(* 7" monitor supports up to two camera door stations, the 4" supports only one.)

**Example only, Other models may differ in connection. See the units supplied manual.*

4 WIRE DOOR VIDEO INTERCOM SYSTEM

An easy to install digital colour video intercom system. Supplied as individual pieces so as to design your custom system that is expandable with additional items. Suitable for DIY home or office video security solutions. Add a door sentry today for low cost and peace of mind.

- 4 wires (polarized wiring) for a simple one cable setup.
- Cable is not supplied. Order to length required.
- Use common twisted pair (eg. CAT5) up to 100M.
- For long lengths or noisy environments, upgrade cables; use dual coax for audio & video & Fig.8 cable for power.
- Connect up to 5 Monitors or
- Combination of Monitors and Handsets
- System is expandable from 1 to 4 outdoor stations or standard CCTV cameras with optional H4-MDS switcher.
- H424 & H427 are compatible on the 4 wire system however not all features are shared (eg. memory).

H4MDS 4-WAY CAMERA SWITCH & DOORWAY CONTROLLER
For more cameras (up to 4) the additional H4MDS is required.
H4MDS is also compatible with standard CCTV type cameras.



4 CORE CABLE

TESTED WITH CAT5 CABLE FOR UP TO 100 METRES
FOR LONGER LENGTHS OR NOISY ENVIRONMENTS,
SHIELDED CABLE IS AVAILABLE. PLEASE ENQUIRE



DOOR CAMERA COMPACT

- Zinc alloy housing attractive design
- Outstanding audio performance
- Wide angle colour CCD Camera
- High resolution Sony ACS 4T DSP
- High white led light for night view
- IP55 protection rated outdoor
- Compact 137x49x28mm
- Available with/without rain cover

NO RAIN HOOD

Code
H4-595

WITH RAIN HOOD

Code
H4-595RH

ANGLE BRACKET

Tilts station left
or right 30°

Code
AB595




TAMPER PROOF CAMERA

IP45 OUTDOOR

Sharp Brand Colour CCD Camera in a heavy-duty outdoor station with rainy cover. Attractive and stylish zinc-alloy housing. Strong waterproof & tamper-proof design. Camera's viewing angle is adjustable. Name plate display with white LED lit. IR Illumination for 0 Lux night vision. 176x90x23mm. Requires cables.

Code
H491RH



IP45 CAMERA DUPLEX

SINGLE CAMERA TO TWO DWELLINGS

IP45 Weather resistant attractive Zinc alloy brushed aluminium styled door station with rain hood. Flush mount. Infrared illuminated. Dual name plate illuminated. Two button door bell push. 176x90x23mm

Code
H4-92RH

LOOK-C
Door Intercom Systems



<http://data.wescomponents.com/lookc/>



Look-C Door Intercom


7" LCD COLOUR VIDEO DOOR INTERCOM H427DT

LOOK-C LOW-PROFILE WIDE-SCREEN

Low-profile 23mm thick, 240x145mm monitor with frame in 2 colours. View full colour high resolution 7" TFT-LCD Screen 1440x234 pixels. Answer 1 or 2 doors via the video intercom (*up to 4 units w/ H4-MDS) Push-button door opening function (Requires optional door latch) Expandable system to more H427 & H424 monitors & door cameras. Simple 4-wire system (Cable Not Included) up to 100 Metres of CAT5. Attractive & stylish wall mount unit, easy to install, setup and operate. Includes mains power adaptor for monitor (and one or two door stations). SD Card memory model is available optionally, see SDD version below.

| Description | Code |
|-------------|--------|
| 7" Monitor | H427DT |

This 7" monitor will support one or two door stations. For more camera or door station inputs, see H4QSW Quad Screen or H4MDS Camera Splitter.

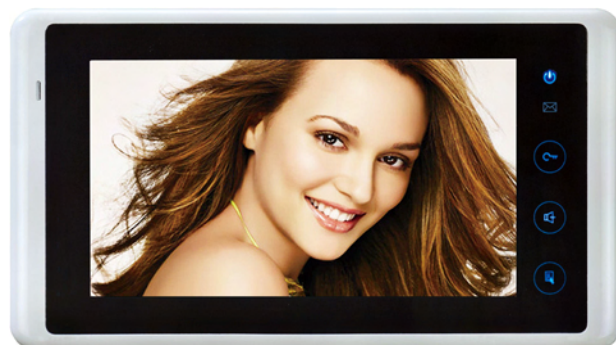


7" WITH OPTIONAL RECORDING FEATURE H4

128MB VIDEO MEMORY INBUILT - MicroSD EXPANDABLE

Automatic function for recording each door button press, ready for instant playback when you get home, to see who came while you were out! This unit stores 3x 10 second video captures plus a *SD micro expansion slot to extend this. Doubles as a Photo Frame SD memory image player too! *SD micro card up to 16GB is extra.

| Description | Code |
|-------------------------|---------|
| 7" Monitor SD Memory | H427SDD |
| Monitor Wiring Splitter | H4BDU |
| Door Camera Splitter | H4MDS |
| Quad Screen | H4QSW |
| Remote Light Switch | H4RLC |

Expansion options. See next page for details.



**TOUCH SCREEN
OSD MENU**



**RECORDS 10 SECONDS
ON EACH DOORBELL PRESS**



**BUILT-IN MEMORY PLUS
SD-MICRO CARD SLOT MEMORY (Optional)**



**SD SLIDE-SHOW FEATURE
CYCLES FAVOURITE PHOTOS**



**INTERCOMM (AUDIO ONLY)
TALK BETWEEN BASE STATIONS**



4" LCD COLOUR VIDEO DOOR INTERCOM H4

High resolution 4" TFT Digital LCD Screen in a wall-mount enclosure. Large illuminated talk button. Optional "unlock" door latch available. 210x160x25mm Low profile, attractive wall mount modern design. Intercom between additional monitors and/or handsets. Expands to up to 5 monitors or combinations of monitors and handsets. Easy to install 4 Core cable solution. Order cable separately. Requires H4 system door station camera - Sold Separately. Includes mains power adaptor for monitor (also runs one door station). Optional Memory Module stores images captured during door bell press.

| Description | Code |
|---------------|-------|
| 4" Monitor | H424 |
| Memory Module | H4MEM |

H4MEM is an extra module for video storage that captures visitor images while you are not at home.


**4-WIRE
VIDEO
SYSTEM**

TOUCH BUTTON




Advanced Structure - With Additional Parts

H424 with Connection
Using the H424 (Main Distribution Switch) unit to extend 4 door stations or CCTV cameras.



RLC with connection
Using the RLC (Remote Lock) unit to extend 4 door stations or CCTV cameras.



**OPTIONAL
MEMORY
UPGRADE**



**OPTIONAL
DOOR
STRIKE**





HANDSET ONLY

EXPANSION OPTION WITHOUT MONITOR

Expands an existing intercom door answering system. Connects with any Look-C 4-Wire monitor units. Add-on to the monitor kit for use as an extra station for talking to other handsets, monitors or cameras. Buttons for answering/calling and door release control. Attractive white finish suits any decor. Wall mountable. System can include up to FIVE monitors and/or handsets. Three core cable for connecting to the system is required. No additional power is required. Suit 4-Wire system only.



Code
H4-72

MULTIPLE CAMERA AUTO-SWITCH

UP TO 4 DOOR CAMERAS

Compatible with "Cycle View". Extends the 4-Wire system to 4 cameras in total. Door strike control compatible. Works with standard video sources too! Connect cameras, CCTV, etc.



4-WIRE
VIDEO
SYSTEM

Code
H4MDS



<http://data.wescomponents.com/lookc/>

QUAD SCREEN & CAMERA MODULE ADD-ON

ALLOWS TO VIEW 4 CAMERAS ON ONE 7" SCREEN

Enables combining 4 door cameras or normal composite cameras into the four wire system as well as also viewing all four cameras on a single screen by way of quad split screen. Quad or single viewing is switched at monitor. Compatible with H427DT/SDD 7" units only.



Code
H4QSW




<http://data.wescomponents.com/lookc/>

DOOR STRIKE

FAIL SECURE

Remote entrance Door catch release. Compatible with our door intercoms and other units. Requires a trigger of 12Vdc 500mA to enable a door to be pushed open. Mounts into the frame, replacing the door catch. Power supply NOT included.

Code
EL971

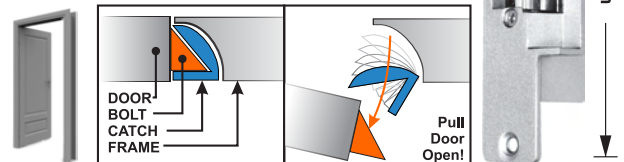


4-WAY MONITOR WIRING SPLITTER

AND SIGNAL BOOSTER

4-Wire monitors are usually wired in a daisy chain fashion. If star type branch wiring is required then use this splitter for connecting up to 4 monitors, or 3 monitors and even more Splitters.



Code
H4BDU

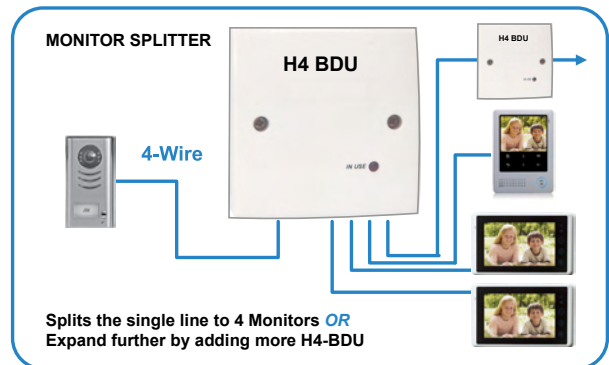

<http://data.wescomponents.com/lookc/>


REMOTE SWITCH

LOW VOLTAGE LIGHT SWITCH

Enables control of a light or second door strike. Single pole, single throw, low voltage relay output.

Code
H4RLC

Connects inline with the 4-Wire system.

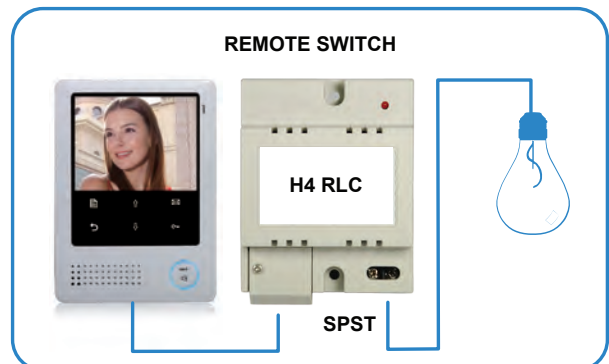

<http://data.wescomponents.com/lookc/>